

HY-OPTIMA™ 2700 Explosion Proof In-line Hydrogen Process Analyzer

Description

H2scan's HY-OPTIMA™ 2700 real time hydrogen-specific process analyzers are designed for ease of use, interface flexibility and true process control. The HY-OPTIMA™ 2700 uses a solid-state sensor that is configured to operate in process gas streams. The HY-OPTIMA™ 2700 is ideal for hydrogen production and petrochemical applications where real-time measurements can enhance process plant efficiencies, diagnostics and maintenance management.

Performance

Hydrogen Sensitivity Range:

0.5% to 100% hydrogen by volume at 1 ATM

Response Time: T90 < 30 sec

Ingress Protection: IP64 capable

Recommended Verification Interval: 90 days

Product Life Expectancy: 10 years

Accuracy(*):

± 0.3% absolute for 0.5 to 10% H₂

± 1.0% absolute for 10 to 100% H₂

Drift/week:

± 0.2% absolute for 0.5 to 10% H₂

± 0.4% absolute for 10 to 100% H₂

Repeatability:

± 0.2% absolute for 0.5 to 10% H₂

± 0.4% absolute for 10 to 100% H₂

Linearity:

± 0.2% absolute for 0.5-10% H₂

± 0.4% absolute for 10-100% H₂

Operating Conditions

Operating Humidity: 0% to 95% RH (non-condensing)

Flow Rate: 0.1 slpm to 50 slpm

Pressure: 0 to 7 bar gauge, 0 to 100 psi gauge

Process Gas Temperature Range: -20°C to 110°C

Operating Temperature Range: -20°C to 55°C

Storage Temperature Range: -30°C to 80°C

Calibration Background Gas: Nitrogen

Adapter Fittings

3/4" Union Tee Compression

Dimensions

Width: 13.8 cm (5.4 in)

Length: 19.2 cm (7.5 in)

Depth: 13.0 cm (5.1 in)

Interface Options

Input Voltage Range: 90 VAC to 240 VAC

Input Power: 15W

Analog Outputs:

Output Currents

- 4 mA to 20 mA

- 0 mA to 20 mA

- User-specific mA range

Serial Communication Options: RS232 or RS422

Relay Contacts: Two programmable relays and one fault relay with both normally open (N.O.) and normally closed (N.C.) contacts:

- 5A/240VAC

- 5A/ 30 VDC


Certifications:

UL 1203

UL 508

USC – Class I, Division 1, Groups B, C, and D

Hazardous (Classified)

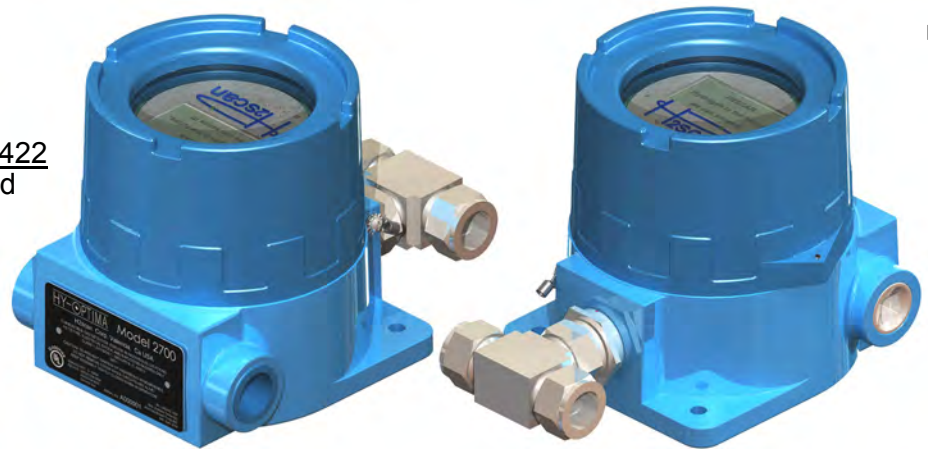

* Sensor performance specifications are only valid for units configured for a maximum 65°C dry process stream and at 25 °C ambient temperature. All figures assume pressure compensation, operating in ambient that do not contain Oxygen and are in addition to any errors in the gasses used. The accuracy is specified for serial port output only.

HY-OPTIMA™ is a registered Trademark of **H2scan**

Specifications subject to change without prior notice

90000057 R2

27215 Turnberry Lane, Unit A, Valencia CA., 91355

Tel: 661-775-9575, Fax: 661-775-9515

Email: sales@h2scan.com, Website: www.h2scan.com